













	Group	II	III
	Fabric	MEDLEY ATLANTIC VITA	XTREME SYNERGY
BPN1 - low			
BPW1 - high			

TECHNICAL DESCRIPTION

The structure of body made of chipboard 18mm, 28mm and HDF 3mm, screwed together with confirmates.
 Body covered with upholstery foam: seat 50mm thick, sides 10mm.
 Polypropylen feet Ø 30mm, 6 pcs, adjustment range 15mm.
 Poufs connected with metal binding elements made of laser-cut profile 2mm, powder coated, black.

DIMENSIONS

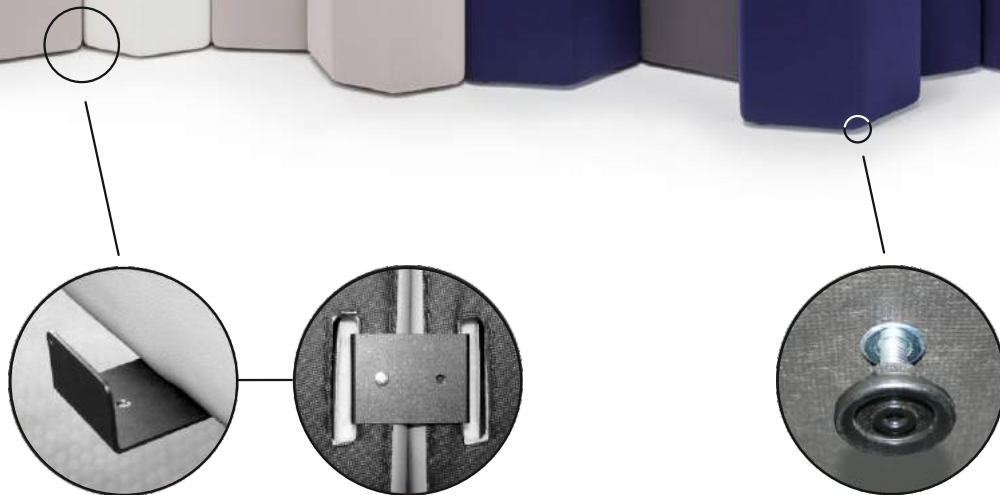

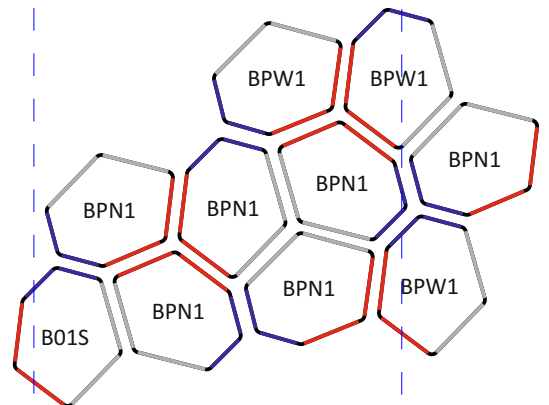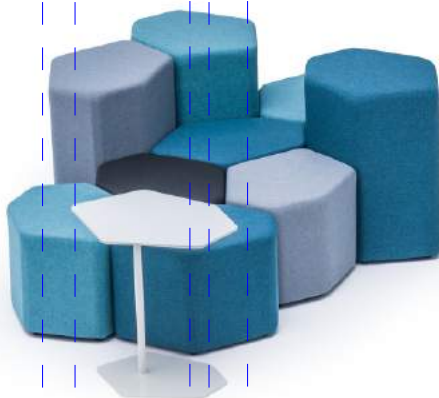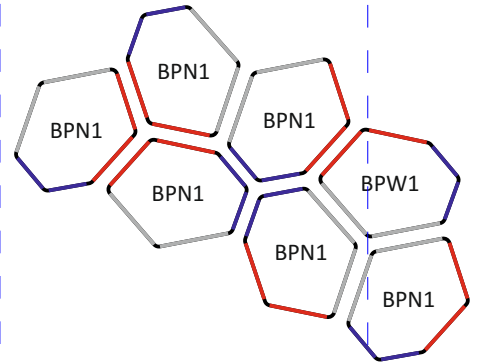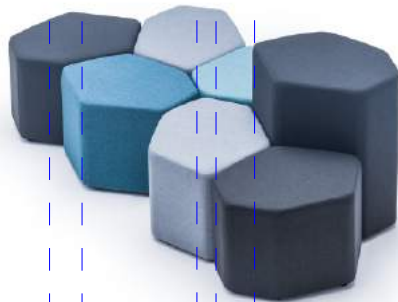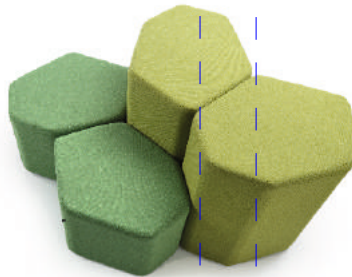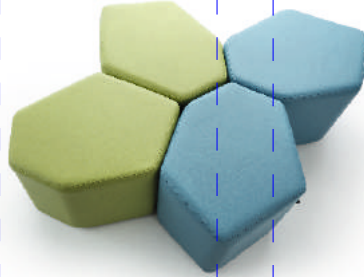


Top Colours	WHITE PASTEL
Frame Colours	WHITE SEMI-MATT
BAZALTO - B01S	

TECHNICAL DESCRIPTION

Top – mass-dyed HPL, 10mm thick, white pastel
 Frame- a vertical column made of a pipe Ø30mm, wall thickness 1,5mm.
 Basis made of sheet metal 5mm thick.
 Powdercoated frame in M015 white semi-matt.

DIMENSIONS



B01S
12 kg
 gross
 D / W / H
 672/525/695



MEDLEY

Group II

M-63064



M-68005



M-68002



M-68115



M-64019



M-67053



M-67006



M-60999



M-66008




M-61002

Technical data

Material
Fabric weight/lm
Abrasion resistance rubs
Pilling resistance
Colour fastness to light
Colour fastness to rubbing
Acoustic test sound absorption
Flammability

polyester 100%
 364g/m2, 510g/lm
 75,000 Martindale cycles
 Scale 1-5, max. 5 - EN ISO 12945-2 4
 Scale 1-8, max. 8 - EN ISO 105-B02 5-7
 Scale 1-5, max. 5 - EN ISO 105x12 (wet/dry) 4-5/4-5
 ISO 354
 BS EN 1021 - 1:2006 (cigarette), BS EN 1021 - 2:2006, California Bulletin CAL 117-E-Class 1,
 Class Uno UNI 9175 Class 1 | EMME CA TB 117-2013

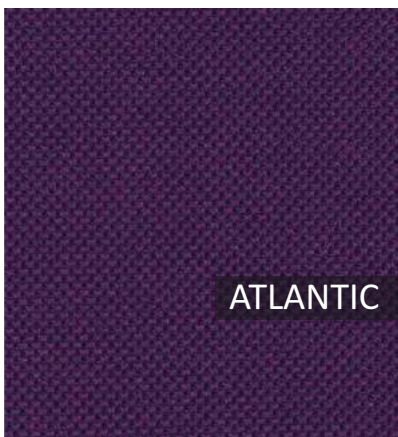

ATLANTIC

Group II

A-65037



A-64089



A-67043



A-66064



A-62048



A-67030



A-60025



A-61078



A-60141



A-60011

Technical data

Material
Fabric weight
Abrasion resistance rubs
Colour fastness to light
Colour fastness to rubbing
Flammability

polyester 100%
 353g/m2, 530g/lm
 110,000 Rubs Martindale (EN ISO 12947-2)
 Scale 1-8, max. 8 - EN ISO 105-B02 5-7
 Scale 1-5, max. 5 - EN ISO 105x12 (wet/dry) 4-5/4-5
 ASTM E 84, BS 476 Part 7, class 1, BS EN 1021-1 cigarett, BS EN 1021-2 Match, CA TB 117-2013,
 Class Uno UNI 9175 Class 1 | EMME NF P 92-503 M3



Group II V-23

VITA




V-01



V-02



V-03




V-04



V-06



V-05



V-07



V-15




V-08



V-18



V-19



V-20

Technical data

- Material**
- Fabric weight**
- Abrasion resistance rubs**
- Flexes**
- Anti-microbial/ Anti-fungal**
- Flammability**

Surface: 98.5% PVC, 1.5% PU, Substrate: 50%, Polyester 50% Cotton
 850g/m2 ±10% (1190G/lin. m ±10%)
 100,000 Martindale cycles, BS EN ISO 5470-2:2003
 BS EN ISO 7854:1997 Method B, 400,000 Flexing cycles
 AATCC 147:2011
 BS EN 1021 - 1:2016 (cigarette), BS EN 1021 - 1:2016 (match),
 BS 5852:2006 Section 4 Ignition Source 5, BS 7176:2017 Medium Hazard,
 NF P 95 503 M2, FMVSS 302 (ISO 3795)



Group III XR420

XTREME CS



XR079



XR026



XR084



XR160




XR430



XR108



XR094



XR081




XR009



Group III YS083

XTREME YS



YS158



YS071



YS166

Technical data

- Material**
- Fabric weight**
- Abrasion resistance rubs**
- Colour fastness to light**
- Colour fastness to rubbing**
- Flammability**

100% Trevira Clame (CS), 100% Recycled (YS). Flame Retardant polyester, Non metallic dyestuffs.
 310g/m2 ±5% (435g/lin.m ±5%)
 60,000 Martindale cycles
 6 (ISO 105 - B02)
 Wet: 4, Dry: 4 (ISO 105 - X12)
 EN 1021 - 1 (cigarette), EN 1021 M - 2 (match), BS 7176 Low Hazard,
 NF P92-507 M1, DIN 4102 B1, UNI 9175 Classe 1 IM, UNI 8456,
 UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800 -1, NF D 60-013




Group III

LDS27



LDS20



LDS53



LDS57



LDS84



LDS08



LDS50




LDS61



LDS85



LDS29



LDS60



LDS69



LDS86



LDS88

Technical data

Material
Fabric weight
Abrasion resistance rubs
Light Fastness
Fastness to Rubbing
Flammability

95% Virgin Wool, 5% Polyamide
 400g/m² ±5% (560g/lin.m ±5%)
 Independently certified to ≥100,000 Martindale cycles
 ISO 105 - B02 5
 ISO 105 - X12 - Wet: 4, Dry: 4
 EN 1021 - 1 (cigarette), EN 1021 - 2 (match), BS 7176 Low Hazard, UNI 9175 Classe 1 IM,
 ÖNORM B 3825 & A 3800-1

Colours presented in the catalogue may vary from the original colours of furniture.